


Badger

Fire Protection

Halotron 1

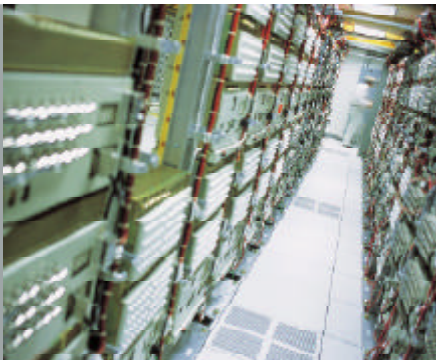

Badger's environmentally acceptable Halon alternative portable extinguishers are designed to meet any special hazard need where Halon-1211 was specified and used.

Halotron-1 is ideal for protecting office computer areas, data storage, telecommunications, high tech clean rooms and sensitive electronic equipment. Halotron-1 meets EPA approval and is the government approved and specified clean agent alternative.

Features

- Available in four sizes, 2½ lb, 5 lb, 11 lb & 15½ lb
- Chrome plated brass valves.
- Stainless steel handle, lever, nozzle and hose band
- Color coded labels for instant type recognition
- Redesigned label incorporating easy to follow instructions and larger fire pictograms
- Approved for use by the Environmental Protection Agency (EPA) and SNAP listed.
- Epoxy coated steel cylinders to resist corrosion, dents and punctures
- 12 year interval between hydrotests
- USCG approved (5 lb, 11 lb & 15½ lb models)

- Halon 1211 clean agent alternative
- FAA approved for use on ramp fire protection
- Low GWP & atmosphere lifetime

UL listed



Models:
 2.5 HB
 5 HB
 11 HB
 15.5 HB



Specifications

| | | | | |
|------------------------------|----------------------------|--------------------------|--------------------------|---------------------------|
| Model Number | 2.5 HB | 5 HB | 11 HB | 15.5HB |
| Nominal Capacity (lbs) | 2.5 | 5 | 11 | 15.5 |
| Nominal Capacity (kilograms) | 1.14 | 2.27 | 5 | 7.05 |
| UL Fire Rating | 2B:C | 5B:C | 1A 10B:C | 2A 10B:C |
| Agent Type | HALOTRON-1 | HALOTRON-1 | HALOTRON-1 | HALOTRON-1 |
| Item Part Number | 23347 | 23348 | 23082 | 23097 |
| Valve Material | Plated Brass | Plated Brass | Plated Brass | Plated Brass |
| Shell Material | Steel | Steel | Steel | Steel |
| Shipping weight (lbs) | 6.85 | 10.6 | 23 | 26.5 |
| Shipping weight (kilograms) | 3.1 | 4.8 | 10.45 | 12.05 |
| Operating Pressure | 100 PSI | 100 PSI | 125 PSI | 125 PSI |
| Temperature Range (°F) | -40 to +120 | -40 to +120 | -40 to +120 | -40 to +120 |
| Discharge Time (seconds) | 9 | 9 | 11 | 14 |
| Discharge Range (feet) | 6-10 | 9-15 | 9-15 | 12-18 |
| Discharge Range (meters) | 1.83-3.05 | 2.74-4.57 | 2.74-4.57 | 3.66-5.49 |
| Unit Height (inches) | 14.88 | 15.25 | 16.19 | 17.13 |
| Unit Height (centimeters) | 37.8 | 38.74 | 41.12 | 43.51 |
| Unit Width (inches) | 6.13 | 6.13 | 8.75 | 8.75 |
| Unit Width (centimeters) | 15.57 | 15.57 | 22.23 | 22.23 |
| Shell Diameter (inches) | 3 | 4.25 | 7.25 | 7.25 |
| Shell Diameter (centimeters) | 7.62 | 10.8 | 18.42 | 18.42 |
| USCG Approval | N/A | YES | YES | YES |
| USCG Bracket | N/A | MB-5 (18440) | HB-11(23131) | HB-11 (23131) |
| Retention Bracket | MB-250 (18405) Included | MB-5 (18440) Optional | HB-11(23131) Optional | HB-11 (23131) Optional |

BFPN0012

Badger

Fire Protection

4251 Seminole Trail
 Charlottesville, VA 22911
 Tel. (800) 446-3857
 Fax. (800) 248-7809
www.badgerfire.com